


### SISAL


2450 x 1050 mm

one-side embossed  
non repeating pattern

#### Textured panel

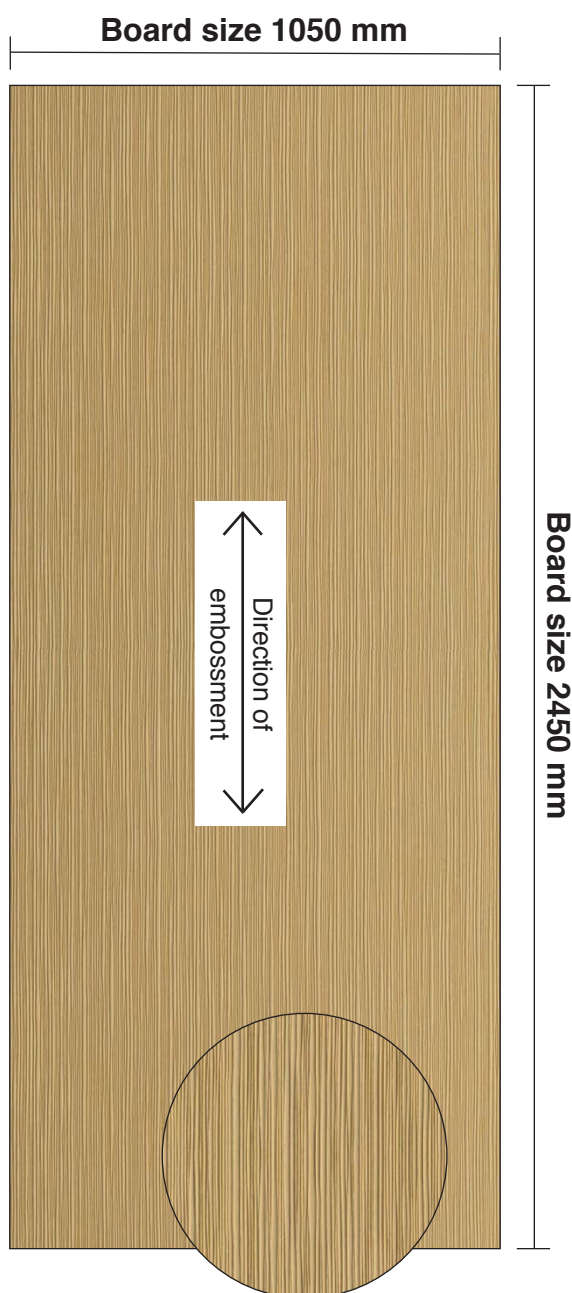

#### Available thicknesses

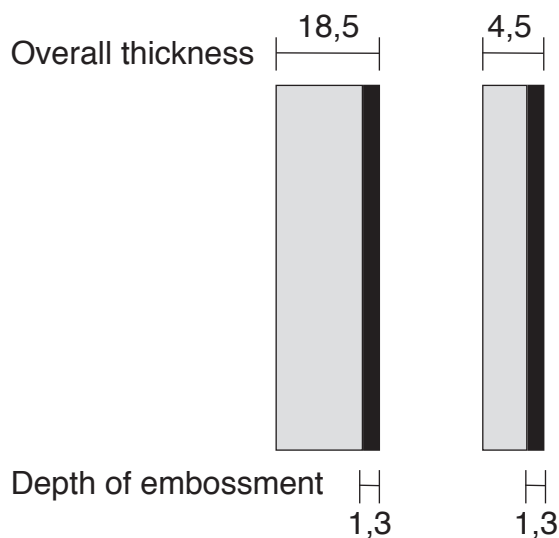

Besides the allowance of  $\pm 0,5$  mm of the total area thickness referring to the highest point there are minor differences in the thickness of the embossment - about 1,3 mm due to the natural design specifications.

#### Tolerances


Height, Width	<600mm	$\pm 0,5$ mm
	>600mm	$\pm 1,0$ mm
Thickness		$\pm 0,5$ mm
Exactitude of profile		$\pm 1,5$ mm
Straightness per meter		$\pm 3,0$ mm

### SISAL


1050 x 2450 mm

one-side embossed  
non repeating pattern

#### Textured panel

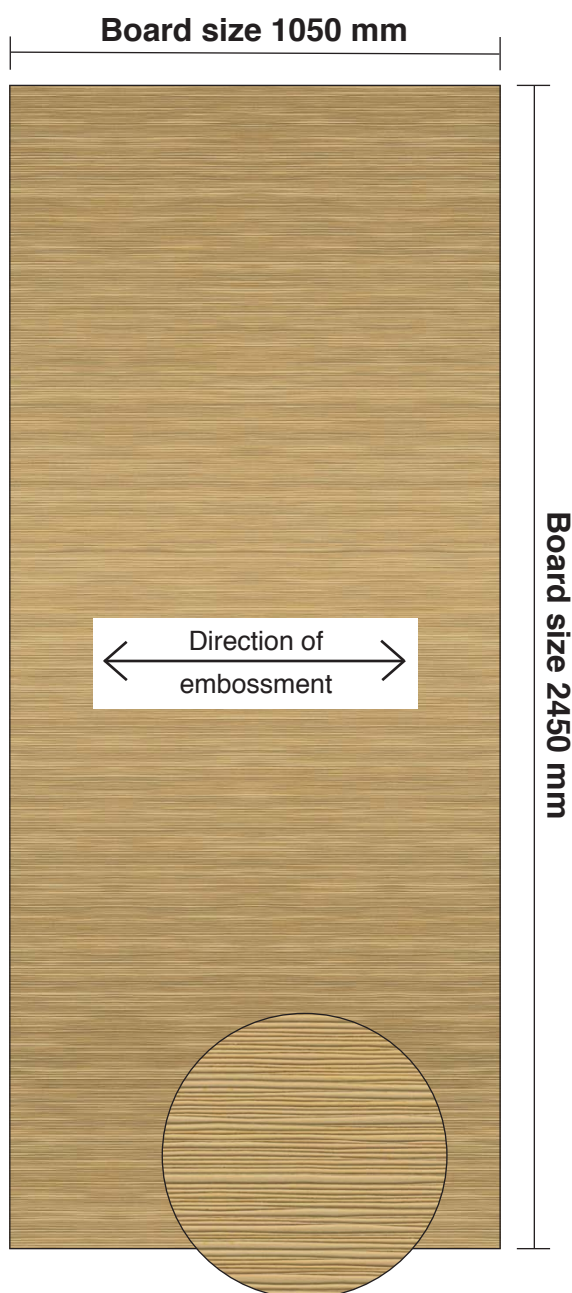

#### Available thicknesses

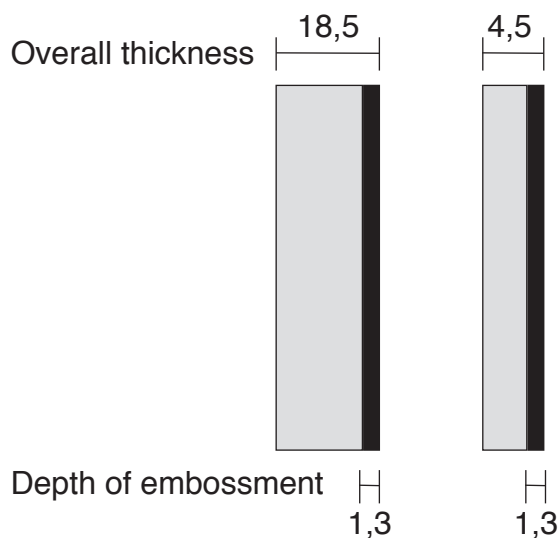

Besides the allowance of  $\pm 0,5$  mm of the total area thickness referring to the highest point there are minor differences in the thickness of the embossment - about 1,3 mm due to the natural design specifications.

#### Tolerances


Height, Width	<600mm	$\pm 0,5$ mm
	>600mm	$\pm 1,0$ mm
Thickness		$\pm 0,5$ mm
Exactitude of profile		$\pm 1,5$ mm
Straightness per meter		$\pm 3,0$ mm

### SISAL


### 3135 x 1270 mm

one-side embossed  
non repeating pattern

#### Textured panel

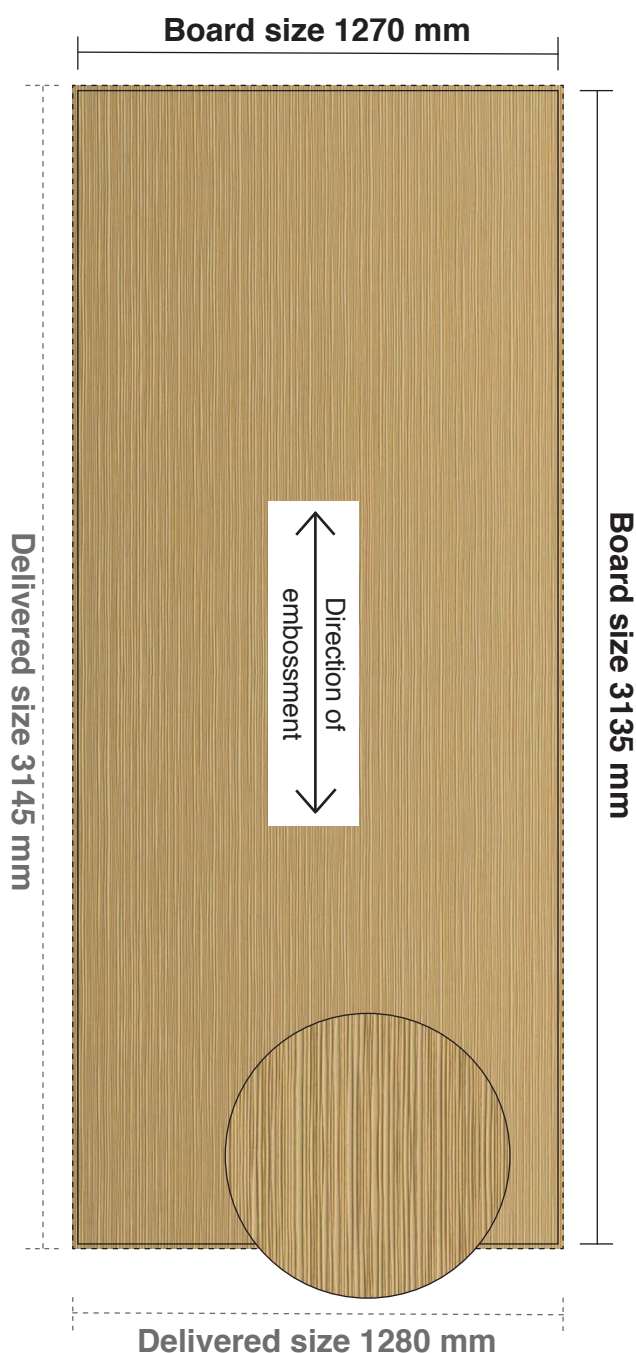

#### Available thicknesses

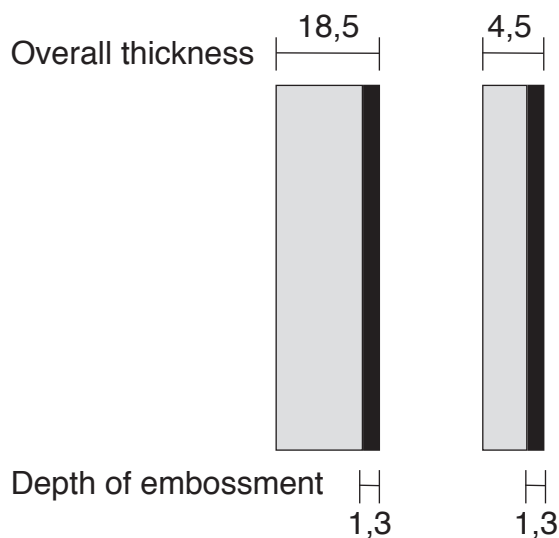

Besides the allowance of  $\pm 0,3$  mm of the total area thickness referring to the highest point there are minor differences in the thickness of the embossment - about 1,3 mm due to the natural design specifications.

#### Tolerances


Height, Width	<600mm	$\pm 0,5$ mm
	>600mm	$\pm 1,0$ mm
Thickness		$\pm 0,5$ mm
Exactitude of profile		$\pm 1,5$ mm
Straightness per meter		$\pm 3,0$ mm

### SISAL


1270 x 3135 mm

one-side embossed  
non repeating pattern

#### Textured panel

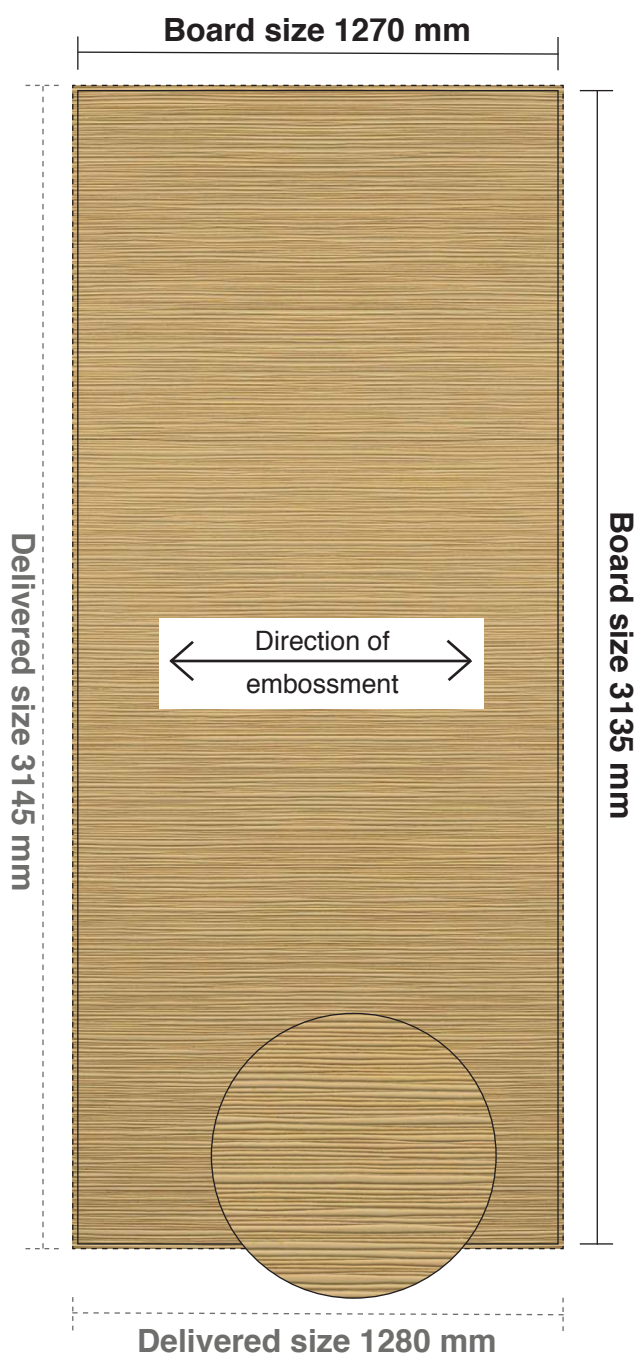

#### Available thicknesses

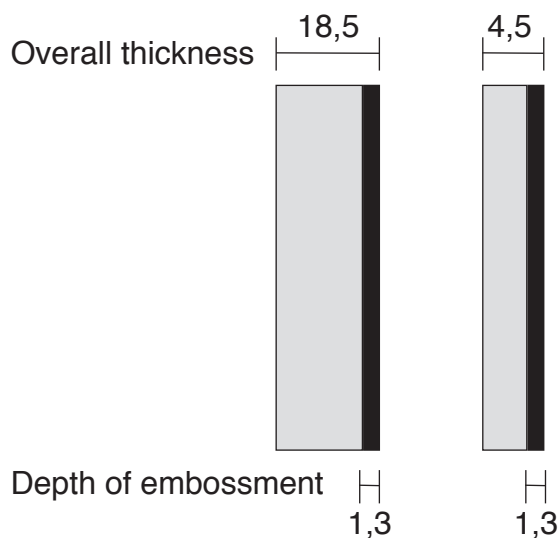

Besides the allowance of  $\pm 0,3$  mm of the total area thickness referring to the highest point there are minor differences in the thickness of the embossment - about 1,3 mm due to the natural design specifications.

#### Tolerances

Height, Width	<600mm	$\pm 0,5$ mm
	>600mm	$\pm 1,0$ mm
Thickness		$\pm 0,5$ mm
Exactitude of profile		$\pm 1,5$ mm
Straightness per meter		$\pm 3,0$ mm